

Ceiling track systems

3001/TC/250 (2.5 m aluminium ceiling track) 3001/TC/420 (4.2 m aluminium ceiling track)

A patented strong and easy to install ceiling track system

The Kenex range of aluminium ceiling tracks provide strong and easy to install systems for suspending radiation shields, surgical lights and other suspended medical equipment.




Features

- The patented design includes the option of an integrated cable management energy chain, which eliminates the need for an untidy festoon cable system with multiple cable holders.
- > The unique aluminium profile ensures smooth movement along the full length of the track.
- > The track & carriage accommodates heavy loads, providing many years of use.
- > Two carriages can be installed for independent movement of up to four suspended devices. Each carriage can be installed with independent cable management if required.
- Each track system can be installed one rail at a time, ensuring quick, easy installation to Unistrut (or equivalent) ceiling channels.
- > Standard lengths: 2.5 m or 4.2 m.
- > Bespoke lengths available.





Technical specification & associated equipment

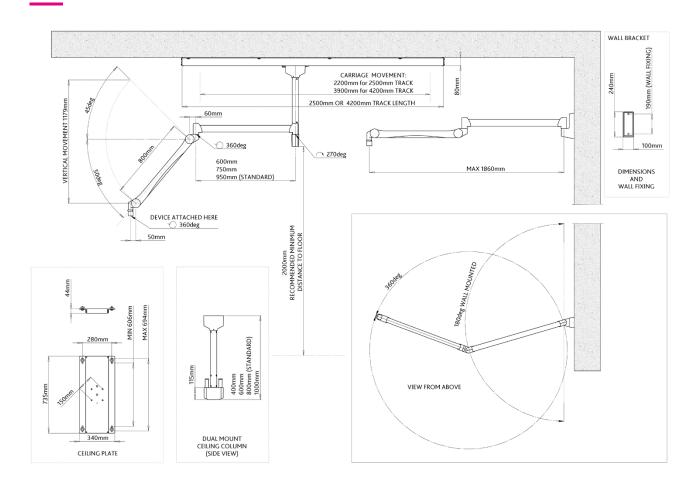

Equipment weights & part numbers

Ceiling track & carriage: 2.5 m (#3001/TC/250): **50 kg**4.2 m (#3001/TC/420): **72 kg**Track cable management: 2.5 m (#3001/TC/250/EC) **1.3 kg**4.2 m (#3001/TC/420/EC) **1.7 kg**

Additional track carriage: For use in 2.5 m or 4.2 m track (#3001/3.25): **4.6 kg**

Dual mount ceiling column: 40 cm (#300/COLUMN/40): **10 kg** 60 cm (#300/COLUMN/60): **11.2 kg**

80 cm (#300/COLUMN-2): **12.5 kg** 100 cm (#300/COLUMN/100): **14.7 kg**

LED 130F lamp head:

LED 150F / 150FP / 150MC lamp head:

LED 300DF SC lamp head:

LED 6MC lamp head:

LED 6MC lamp head:

2.4 kg (approximately)

12 kg (approximately)

16.9 kg (approximately)

Overhead protective shield: 12 kg (approximately)

Suspension arm: 10.4 kg (each)

