

Overhead suspended lead glass shield

350/34-005 (30 cm x 40 cm eyes & thyroid shield, two-part suspension arm & wall mounting bracket)

Wall mounted upper body protection

This 30 cm x 40 cm shield uses 2.2 mm equivalent lead glass (@150 kV) for effective protection of the eyes and thyroid. The robust yoke assembly provides stability and protection to the window. The shield is fitted with a 0.5 mm Pb equivalent flexible curtain which is suspended beneath to further reduce scatter radiation.

350 shield, 30 cm x 40 cm


- > Protection for the eyes and thyroid.
- > Landscape, 30 cm x 40 cm transparent shield with 2.2 mm equivalent lead glass (@150 kV).
- > Suspended, 0.5 mm Pb equivalent flexible curtain. 20 cm in depth.
- > Pivots on the central horizontal axis.

Wall mounted system

- > Wall mounting bracket for wall attachment.
- > Supplied with two-part suspension arm for effective positioning.
- > Arm and shield fold neatly back onto the wall when not in use.



Technical information

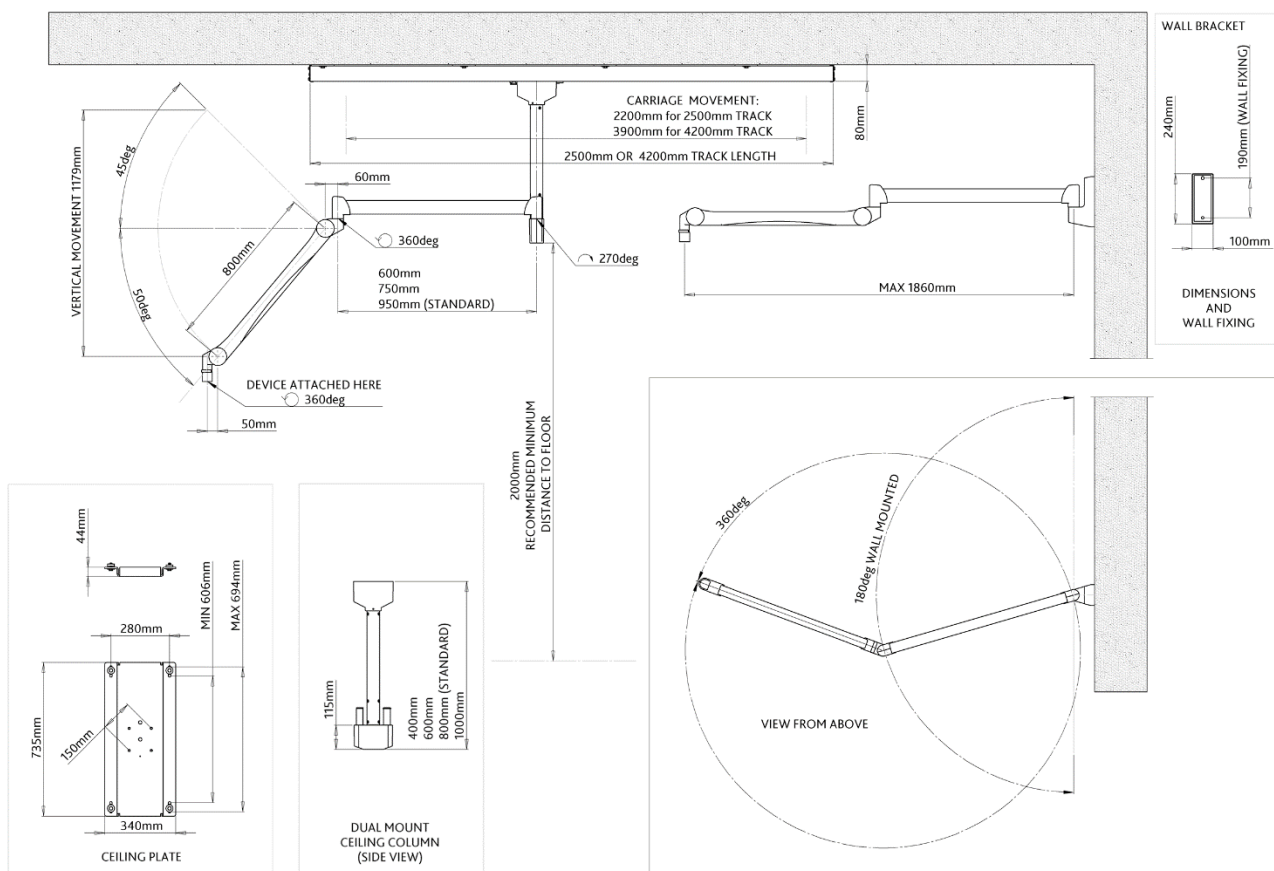

Equipment weights & part numbers

350/34-005

30 x 40 cm type 350 shield assembly: **6.3 kg**

Suspension arm: **10.4 kg**

Wall mounting bracket: **2 kg**