

# Overhead suspended lead acrylic shield

354/76-005 (76 cm x 61 cm centre mounted shield, two-part suspension arm & wall mounting bracket)

## Wall mounted upper body protection


This 76 cm x 61 cm shield uses 0.5 mm equivalent lead acrylic (@150 kV) for effective protection to the upper body. The central mount system allows 360 degrees of rotation ensuring the shields effective positioning. An optional 0.5 mm Pb equivalent curtain can be added to further reduce scatter emanating from the patient. The shield is securely mounted to the wall and the two-part suspension arm can pivot 180 degrees.

## 354 shield, 76 cm x 61 cm


- > 76 cm x 61 cm shield.
- > 0.5 mm equivalent lead acrylic (@150 kV).
- > Central mount system allowing 360 degrees of rotation.
- > Optional 0.5 mm Pb equivalent flexible curtain, fitted across the 61 cm lower profile (354/LR/61). 13 cm in depth.

## Wall mounted system

- > Wall mounting bracket for wall attachment.
- > Supplied with two-part suspension arm for effective positioning.
- > Arm and shield fold neatly against the wall when not in use.

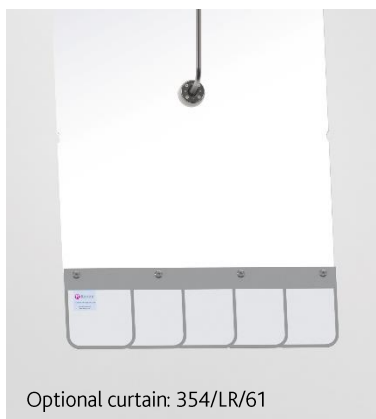

## Technical information

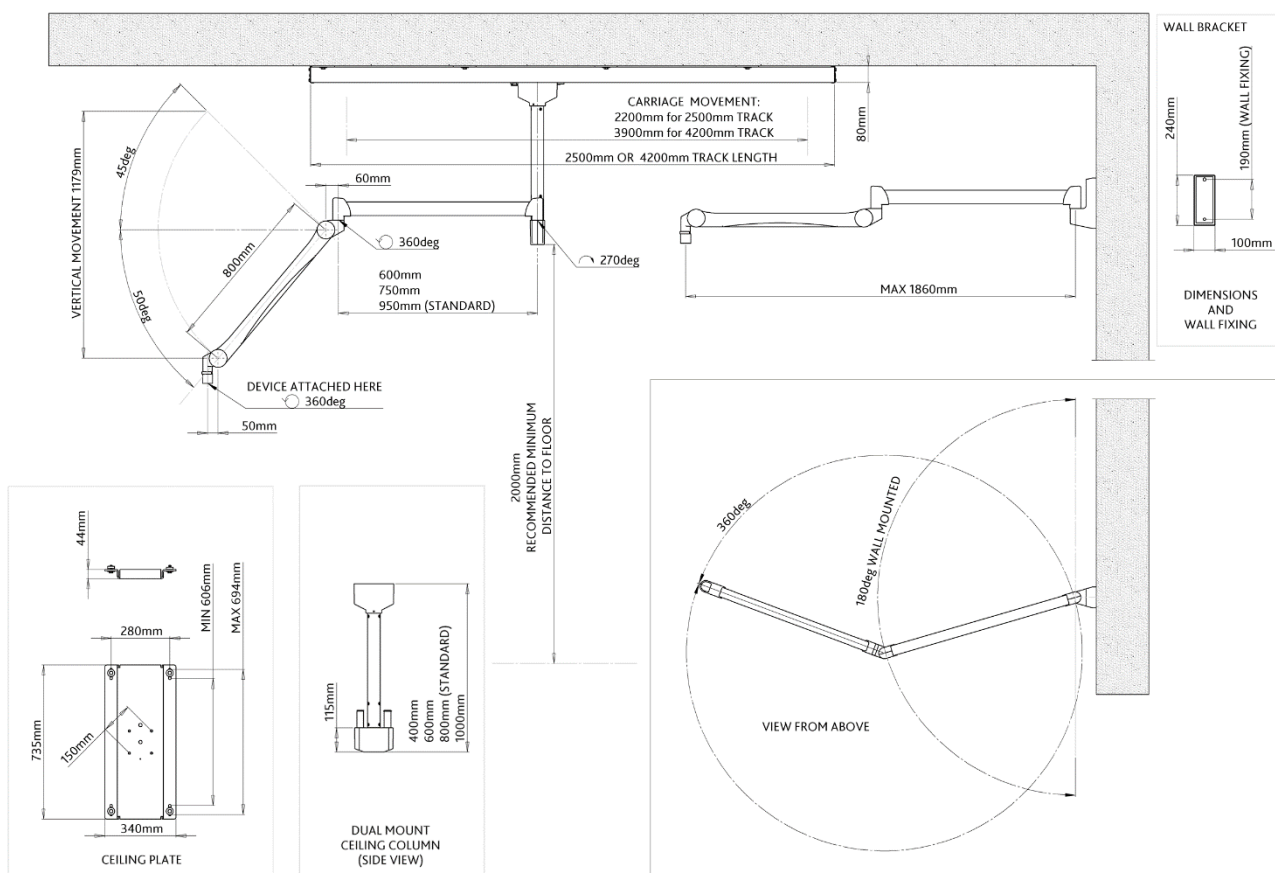

## Equipment weights & part numbers

**354/76-005**

76 x 61 cm type 354 shield assembly: **10.5 kg**

Suspension arm: **10.4 kg**

Wall mounting bracket: **2 kg**