

354 overhead suspended shield & LED 150F lamp

354/P76/LED150F-0031 (250 cm ceiling track, 76 cm x 61 cm centre mounted lead acrylic shield with patient contour cut-out & LED 150F operating lamp)

Track mounted, moveable upper body protection

This 76 cm x 61 cm shield uses 0.5 mm equivalent lead acrylic (@150 kV) for effective protection to the upper body. The central mount system allows 360 degrees of rotation ensuring the shield's corner cut-out can be effectively positioned over a patient. An optional 0.5 mm Pb equivalent curtain can be added to further reduce scatter emanating from the patient. The LED 150F lamp is a small operating light with a light output of 110,000 lux.

354 x-ray shield, 76 cm x 61 cm with corner cut-out

- > 0.5 mm equivalent lead acrylic (@150 kV).
- > Central mount system allows 360 degrees of rotation.
- > Optional: 0.5 mm Pb equivalent flexible curtain fitted across the 61 cm lower profile (354/P/LR).


LED 150F operating lamp

- > Light intensity at 1 metre: 110,000 Lux.
- > Colour rendering index R_a 97.
- > Colour rendering index R_9 97.
- > Focusable light field size: 16 cm to 24 cm.
- > Electronic light intensity control at lamp head: 50% to 100%.
- > Colour temperature: 4500 Kelvin.
- > Temperature increase at head area: 0.5°C.
- > Total power consumption: 24 W.
- > Light source: 26 LED's.
- > Life span of over 60,000 hours.
- > Diameter of lamp head: 40 cm.
- > Detachable sterilizable handle included.


Ceiling track system

- > Consisting of:
 - 250 cm aluminium track* and moveable carriage
 - 80 cm ceiling column*
 - 2 x two-part suspension arm
 - 76 x 61 cm shield with corner cut-out
 - LED 150F lamp
- > Optional extras:
 - Second track carriage - for two additional suspended devices.
 - Cable management system so lamp cables can be contained and managed within a separately supplied flexible energy chain.

* See over - other lengths available.



Technical specification

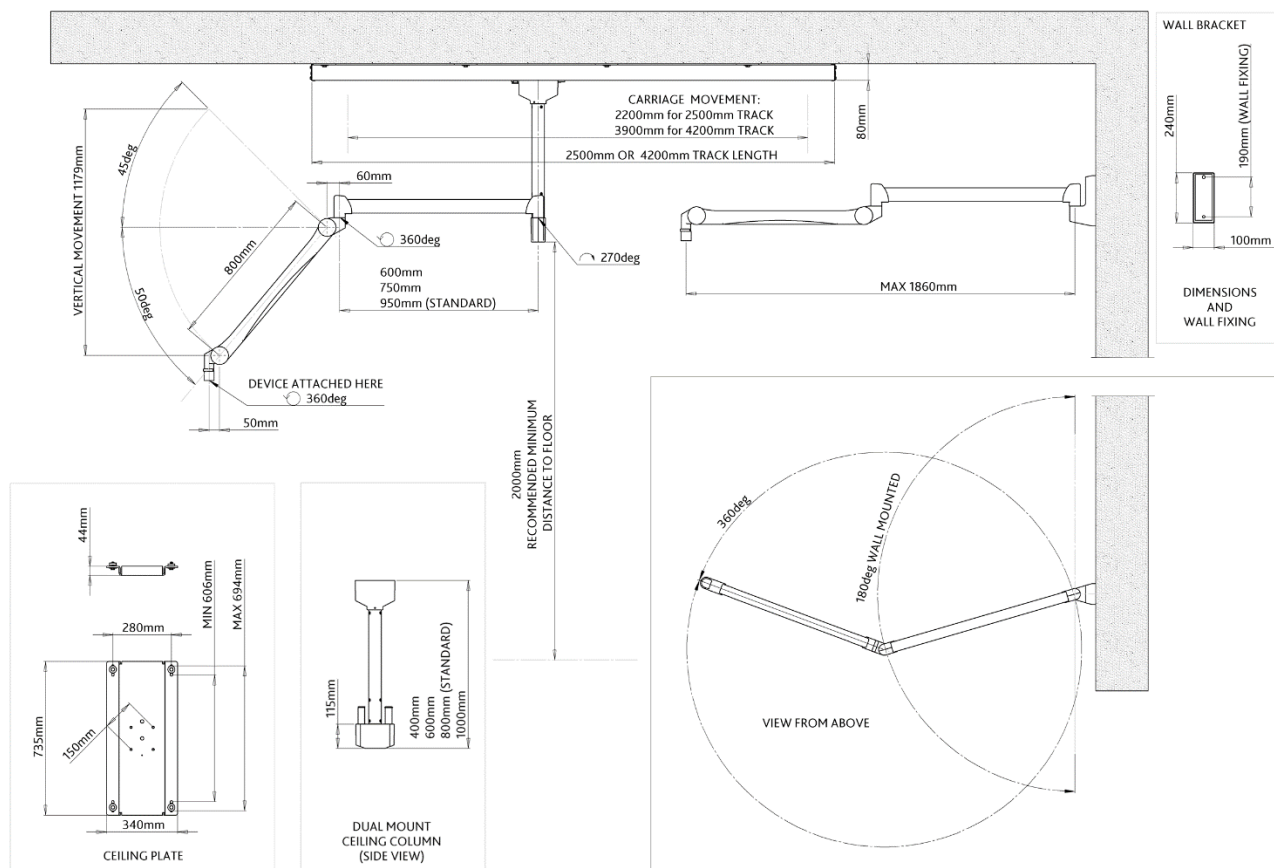

Equipment weights & part numbers

354/P76/LED150F-0031

Power supply in housing

LED 150F lamp head: **3.5 kg**

76 x 61 cm type 354 shield assembly with corner cut-out: **9.5 kg**

2 x Suspension arm: **10.4 kg** (each)

80 cm dual mount ceiling column: **12.5 kg**

2.5 m ceiling track & carriage: **50 kg**

Optional equipment:

Dual mount ceiling column:

- 40 cm (#300/COLUMN/40): **10 kg**
- 60 cm (#300/COLUMN/60): **11.2 kg**
- 100 cm (#300/COLUMN/100): **14.7 kg**

Ceiling track & carriage: 4.2 m (#3001/TC/420): **72 kg**

Track cable management: 2.5 m (#3001/TC/250/EC): **1.3 kg**

4.2 m (#3001/TC/420/EC): **1.7 kg**

Additional track carriage: For use in 2.5 m or 4.2 m track (#3001/3.25): **4.6 kg**