



Protective clothing

# X-ray protective clothing

## 917 *LytaType* double-sided short top apron

### Features

- > An alternative to model 915 for use with kilt model 919.
- > Fitted with a shoulder clip and fastenings on both sides.

### Tailor made

- > Tailor made *LytaType* personal x-ray protective clothing is available. Please contact us for required measurements.

Model 917



### *LytaType* colours and codes


Please note the colours shown are approximate. A colour swatch is available on request.



Royal  
02



Navy  
04



Poppy  
11



Bottle Green  
41

### **S** Small for chest sizes (A) 80 – 90 cm girth

Lead equivalent (Pb)* Front and back	Length (B)	Apron width shoulder / hip	Maximum girth	Product code
0.25 / 0.25 mm	52 cm	40 cm / 60 cm	100 cm	917/22/S
0.35 / 0.25 mm	52 cm	"	"	917/32/S
0.35 / 0.35 mm	52 cm	"	"	917/33/S

\*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.

### **M** Medium for chest sizes (A) 90 – 100 cm girth

Lead equivalent (Pb)* Front and back	Length (B)	Apron width shoulder / hip	Maximum girth	Product code
0.25 / 0.25 mm	58 cm	48 cm / 60 cm	100 cm	917/22/M
0.35 / 0.25 mm	58 cm	"	"	917/32/M
0.35 / 0.35 mm	58 cm	"	"	917/33/M

\*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.



Protective clothing


**L** Large for chest sizes (A) 100 – 120 cm girth

Lead equivalent (Pb)* Front and back	Length (B)	Apron width shoulder / hip	Maximum girth	Product code
0.25 / 0.25 mm	70 cm	48 cm / 75 cm	120 cm	917/22/L
0.35 / 0.25 mm	70 cm	"	"	917/32/L
0.35 / 0.35 mm	70 cm	"	"	917/33/L

\*Pb: Lead vinyl in accordance with BS EN 61331-1:2014 in the 50 to 150 kV range of x-ray tube voltages.

**Optional extras: -**

Description	Product code
Pocket	900/001
Embroidery in a position to be specified	9/B20

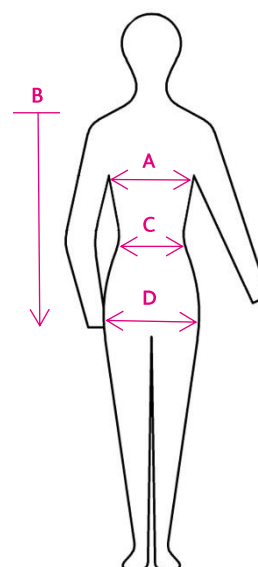

Kenex are certified to Regulation (EU) 2016/425 (PPE) for the design and manufacture of x-ray protective clothing. LytaType aprons and thyroid collars comply with the requirements of BS EN 61331-3:2014 and BS EN 13402-3:2013. They include lead (Pb) vinyl material tested for use with a 50 to 150 kV range of x-ray tube voltages, as specified in BS EN 61331-1:2014.

Notified body: SGS Fimko Oy, P.O. Box 30 (Särkiniementie 3), 00211 Helsinki Finland.  
Identification number CE 0598.